

# Public space lighting series : Dustproof and waterproof lamps

## 公共空間照明系列：防塵防水燈具



◎LUS-136



◎LUS-236



### Lighting frame dimensions (燈具尺寸示意圖):

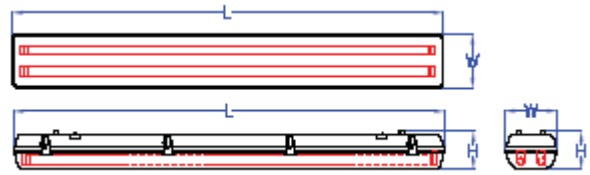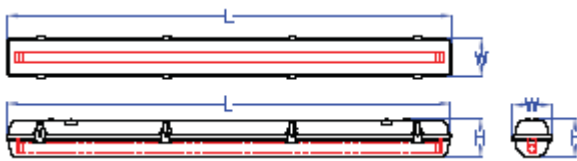

### Direction (說明):

For lamps: T5 TL5 80W, 35W, 54W, 28W, 24W, 14W \*2    TL5 80W, 35W, 54W, 28W, 24W, 14W \*1

Material: Luminaries body→ABS

Sunshade→acrylic

Application: Basement, tunnel , parking lot, kitchen, bathroom, service station, charge station, the larger place of the internal and external humidity of the room, factory etc.

Characteristic: Made-in-Taiwan quality electronic ballast installed.

Note	Type	For lamps	Ballast	Dimension (L×W×H)
	LUS-280	T5→TL5 80W×2	Electronic ballast	1570×157×100mm
	LUS-235	T5→TL5 35W×2	Electronic ballast	1570×157×100mm
	LUS-254	T5→TL5 54W×2	Electronic ballast	1270×157×100mm
	LUS-228	T5→TL5 28W×2	Electronic ballast	1270×157×100mm
	LUS-224	T5→TL5 24W×2	Electronic ballast	667×157×100mm
	LUS-214	T5→TL5 14W×2	Electronic ballast	667×157×100mm
	LUS-180	T5→TL5 80W×1	Electronic ballast	1570×98×100mm
	LUS-135	T5→TL5 35W×1	Electronic ballast	1570×98×100mm
	LUS-154	T5→TL5 54W×1	Electronic ballast	1270×98×100mm
	LUS-128	T5→TL5 28W×1	Electronic ballast	1270×98×100mm
	LUS-124	T5→TL5 24W×1	Electronic ballast	667×98×100mm
	LUS-114	T5→TL5 14W×1	Electronic ballast	667×98×100mm


## Public space lighting series : Dustproof and waterproof lamps

### 公共空間照明系列：防塵防水燈具

◎NE-136



#### Lighting frame dimensions (燈具尺寸示意圖):

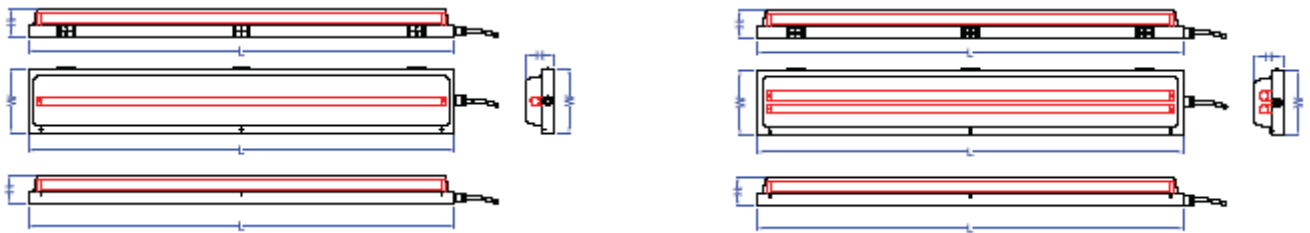

#### Direction (說明):

For lamps: T5 TL5 54W, 28W \*2 TL5 54W, 28W \*1

Material: SPCC coated fixture of 1.0mm thickness. The metalwork shall be rust inhibited to prevent corrosion. Reflector is mild steel sheet of 0.3mm thickness. Sunshade is PC.

Application: Basement, tunnel , parking lot, kitchen, bathroom, service station, charge station, the larger place of the internal and external humidity of the room, factory etc.

Characteristic: Made-in-Taiwan quality electronic ballast installed.


Note	Type	For lamps	Ballast	Dimension (LxWxH)
	NE-254	T5→TL5 54Wx2	Electronic ballast	1274x190x85mm
	NE-228	T5→TL5 28Wx2	Electronic ballast	1274x190x85mm
	NE-154	T5→TL5 54Wx1	Electronic ballast	1274x190x85mm
	NE-128	T5→TL5 28Wx1	Electronic ballast	1274x190x85mm

# Public space lighting series : Dustproof and waterproof lamps

## 公共空間照明系列：防塵防水燈具

### Lighting frame dimensions (燈具尺寸示意圖):

◎NS-282801

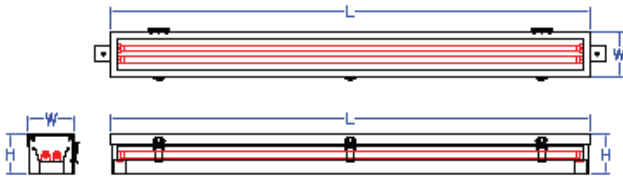

### Direction (說明):

For lamps: T5 TL5 80W, 35W, 54W, 28W\*2      TL5 39W, 21W, 24W, 14W \*2  
                   T5 TL5 80W, 35W, 54W, 28W\*1      TL5 39W, 21W, 24W, 14W \*1

**Material:** SPCC coated fixture of 1.0mm thickness. The metalwork shall be rust inhibited to prevent corrosion. Reflector is mild steel sheet of 0.5mm thickness. Sunshade is transparent glass of 3.0mm thickness.

**Application:** Basement, tunnel , parking lot, kitchen, bathroom, service station, charge station, the larger place of the internal and external humidity of the room, factory etc.

**Characteristic:** Made-in-Taiwan quality electronic ballast installed.

Note	Type	For lamps	Ballast	Dimension (L×W×H)
	NS-802801	T5→TL5 80W×2	Electronic ballast	1550×120×105mm
	NS-352801	T5→TL5 35W×2	Electronic ballast	1550×120×105mm
	NS-542801	T5→TL5 54W×2	Electronic ballast	1250×120×105mm
	NS-282801	T5→TL5 28W×2	Electronic ballast	1250×120×105mm
	NS-392801	T5→TL5 39W×2	Electronic ballast	950×120×105mm
	NS-212801	T5→TL5 21W×2	Electronic ballast	950×120×105mm
	NS-242801	T5→TL5 24W×2	Electronic ballast	640×120×105mm
	NS-142801	T5→TL5 14W×2	Electronic ballast	640×120×105mm
	NS-801801	T5→TL5 80W×1	Electronic ballast	1550×120×105mm
	NS-351801	T5→TL5 35W×1	Electronic ballast	1550×120×105mm
	NS-541801	T5→TL5 54W×1	Electronic ballast	1250×120×105mm
	NS-281801	T5→TL5 28W×1	Electronic ballast	1250×120×105mm
	NS-391801	T5→TL5 39W×1	Electronic ballast	950×120×105mm
	NS-211801	T5→TL5 21W×1	Electronic ballast	950×120×105mm
	NS-241801	T5→TL5 24W×1	Electronic ballast	640×120×105mm
	NS-141801	T5→TL5 14W×1	Electronic ballast	640×120×105mm


# Public space lighting series : Dustproof and waterproof lamps

## 公共空間照明系列：防塵防水燈具

©SUS-136



### Lighting frame dimensions (燈具尺寸示意圖):

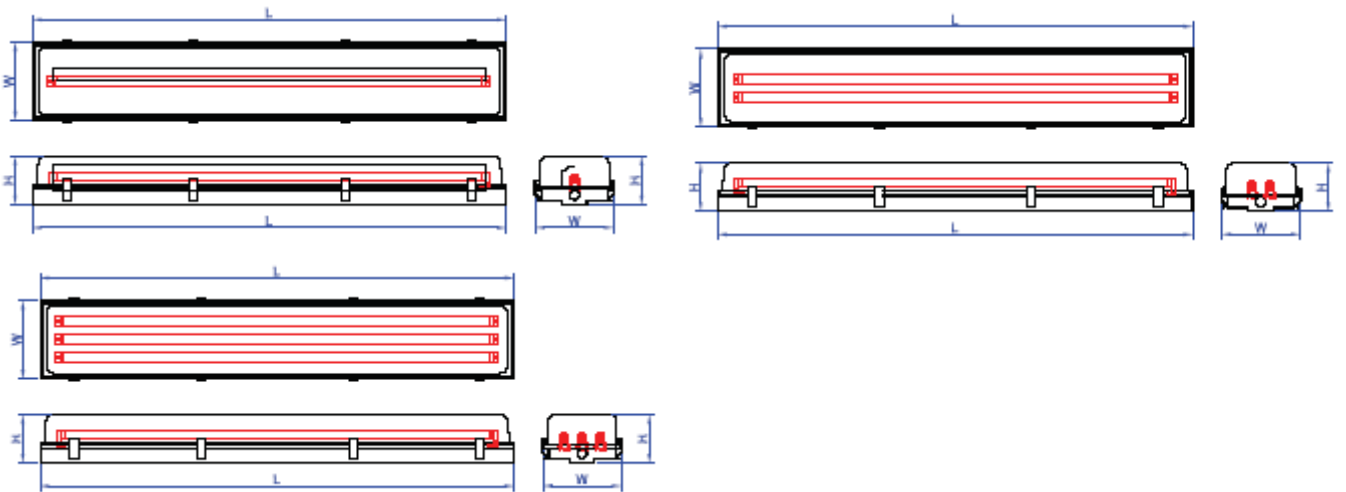

### Direction (說明):

For lamps: T5 TL5 54W, 28W\*3      TL5 54W, 28W\*2      TL5 54W, 28W\*1

Material: SPCC coated fixture of 1.0mm thickness. The metalwork shall be rust inhibited to prevent corrosion. Reflector is mirror surface aluminum of 0.3mm thickness. Sunshade is PC of 2.8mm thickness.

Application: Basement, tunnel , parking lot, kitchen, bathroom, service station, charge station, the larger place of the internal and external humidity of the room, factory etc.

Characteristic: Made-in-Taiwan quality electronic ballast installed.

Note	Type	For lamps	Ballast	Dimension (LxWxH)
	SUS-354	T5→TL5 54Wx3	Electronic ballast	1310x215x133mm
	SUS-328	T5→TL5 28Wx3	Electronic ballast	1310x215x133mm
	SUS-254	T5→TL5 54Wx2	Electronic ballast	1310x215x133mm
	SUS-228	T5→TL5 28Wx2	Electronic ballast	1310x215x133mm
	SUS-154	T5→TL5 54Wx1	Electronic ballast	1310x215x133mm
	SUS-128	T5→TL5 28Wx1	Electronic ballast	1310x215x133mm


# Public space lighting series : Dustproof and waterproof lamps

## 公共空間照明系列：防塵防水燈具

©FS-130/236



### Lighting frame dimensions (燈具尺寸示意圖):

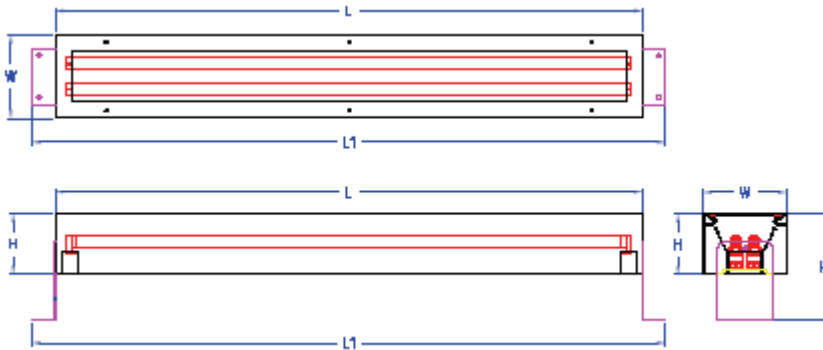

### Direction (說明):

For lamps: T5 TL5 54W, 28W\*3      TL5 54W, 28W\*2      TL5 54W, 28W\*1

**Material:** SPCC coated fixture of 1.0mm thickness. The metalwork shall be rust inhibited to prevent corrosion. Reflector is mild steel sheet of 0.3mm thickness. Sunshade is transparent glass of 3.0mm thickness.

**Application:** Basement, tunnel , parking lot, kitchen, bathroom, service station, charge station, the larger place of the internal and external humidity of the room, factory etc.

**Characteristic:** Made-in-Taiwan quality electronic ballast installed.

Note	Type	For lamps	Ballast	Dimension (L×W×H)
	FS130/280	T5→TL5 80W×2	Electronic ballast	1570×180×130mm (L1:1670, H:230)
	FS130/235	T5→TL5 35W×2	Electronic ballast	1570×180×130mm (L1:1670, H:230)
	FS130/254	T5→TL5 54W×2	Electronic ballast	1270×180×130mm (L1:1370, H:230)
	FS130/228	T5→TL5 28W×2	Electronic ballast	1270×180×130mm (L1:1370, H:230)
	FS130/239	T5→TL5 39W×2	Electronic ballast	921×180×130mm (L1:1021, H:230)
	FS130/221	T5→TL5 21W×2	Electronic ballast	921×180×130mm (L1:1021, H:230)
	FS130/224	T5→TL5 24W×2	Electronic ballast	651×180×130mm (L1:751, H:230)
	FS130/214	T5→TL5 14W×2	Electronic ballast	651×180×130mm (L1:751, H:230)

