


# T-BAR lighting series: Air conditioner model lighting

## T-BAR 式照明系列：空調型燈具

©TL-144068A(101)



### Lighting frame dimensions (燈具尺寸示意圖)

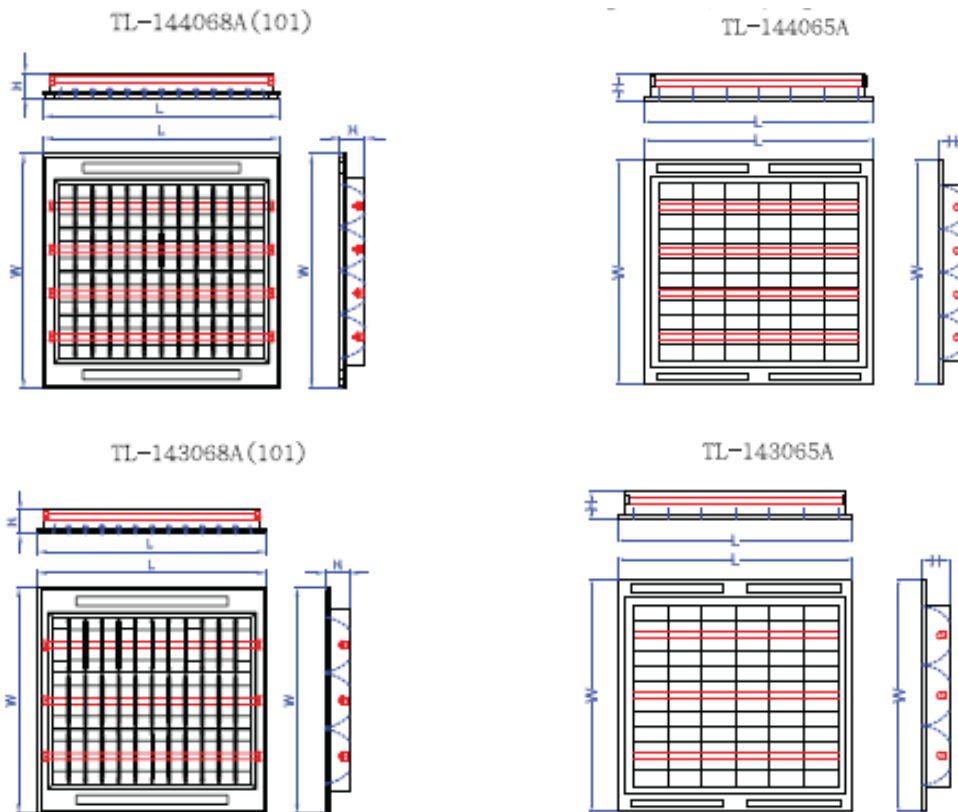

### Direction (說明):

For lamps: T5 TL5 24W, 14W \*4

For lamps: T5 TL5 24W, 14W\*3

Material: Mild steel sheet of 0.6mm thickness. The metalwork shall be rust inhibited to prevent corrosion.

Sunshade is nebulized surface aluminum of 0.3mm thickness. (Can choose mirror surface aluminum)

Application: Officer, Meeting room, Building, Department shop, Library etc.

Characteristic: Low glare air conditioner model lighting.

Made-in-Taiwan quality electronic ballast installed

Specification	Type	For lamps	Ballast	Dimension (LxWxH)
2' x 2'	TL-144068A(101)	T5→TL5 14Wx4	Electronic ballast	603x603x64mm
2' x 2'	TL-143068A(101)	T5→TL5 14Wx3	Electronic ballast	603x603x64mm
2' x 2'	TL-144065A	T5→TL5 24Wx4	Electronic ballast	603x603x70mm
2' x 2'	TL-143065A	T5→TL5 14Wx3	Electronic ballast	603x603x70mm


(續上頁)

Specification	Type	For lamps	Ballast	Dimension (L×W×H)
2'× 2'	TL-244068A(101)	T5→TL5 24W×4	Electronic ballast	603×603×64mm
2'× 2'	TL-243068A(101)	T5→TL5 24W×3	Electronic ballast	603×603×64mm
2'× 2'	TL-244065A	T5→TL5 24W×4	Electronic ballast	603×603×70mm
2'× 2'	TL-243065A	T5→TL5 24W×3	Electronic ballast	603×603×70mm


## T-BAR lighting series: Air conditioner model lighting

## T-BAR 式照明系列：空調型燈具

◎TL-144068A

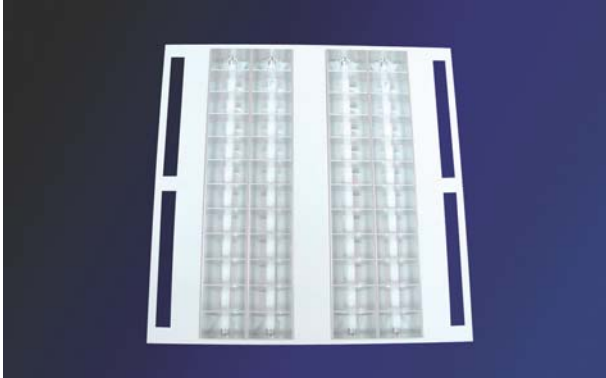


◎TL-144068A百葉型

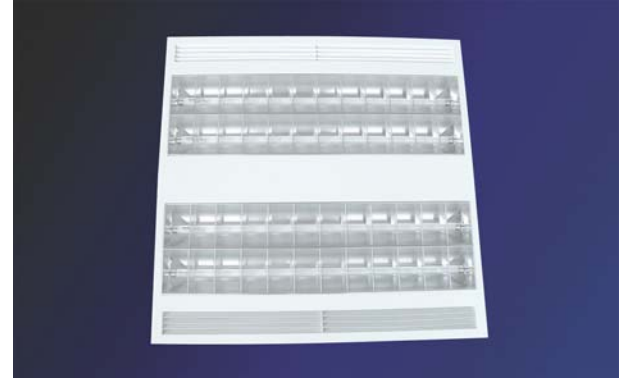


### Lighting frame dimensions (燈具尺寸示意圖)

TL-144068A

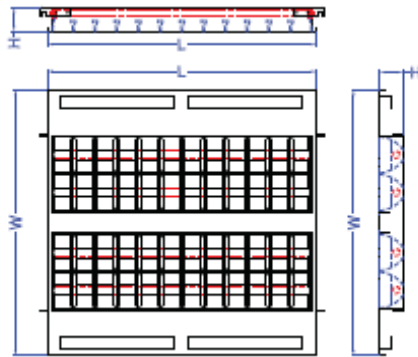

TL-144068A百葉型

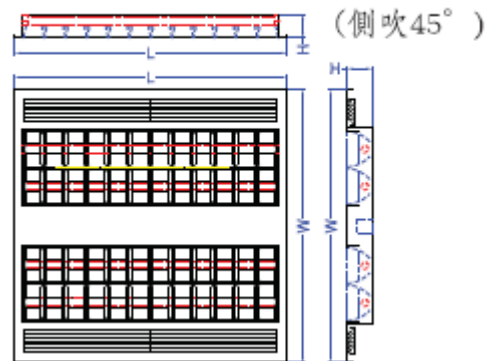

### Direction (說明):

For lamps: T5 TL5 24W, 14W \*4

Material: Mild steel sheet of 0.5mm thickness. The metalwork shall be rust inhibited to prevent corrosion.

Sunshade is nebulized surface aluminum of 0.3mm thickness. (Can choose mirror surface aluminum)

Application: Officer, Meeting room, Building, Department shop, Library etc.

Characteristic: High efficiency air conditioner model lighting.

Made-in-Taiwan quality electronic ballast installed


Specification	Type	For lamps	Ballast	Dimension (L×W×H)
	TL-144068A	T5→TL5 14W×4	Electronic ballast	585×585×52mm
	TL-244068A	T5→TL5 24W×3	Electronic ballast	585×585×52mm
2'× 2'	TL-244068A 百葉型	T5→TL5 14W×4	Electronic ballast	603×603×55mm
2'× 2'	TL-243065A 百葉型	T5→TL5 24W×3	Electronic ballast	603×603×55mm

## T-BAR lighting series: Air conditioner model lighting

### T-BAR 式照明系列：空調型燈具

Lighting frame dimensions (燈具尺寸示意圖)

◎TL-43065A

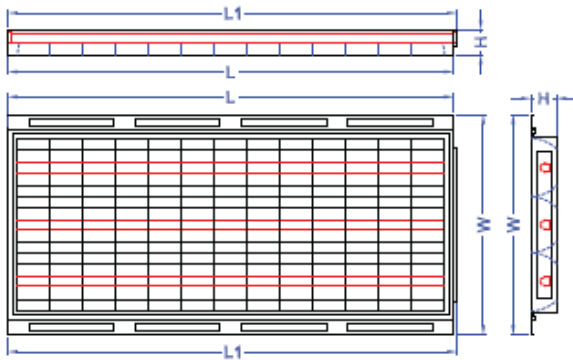

#### Direction (說明):

For lamps: T5 TL5 54W, 24W \*4      T5TL5 54W, 24W \*3


Material: Mild steel sheet of 0.5mm thickness. The metalwork shall be rust inhibited to prevent corrosion.

Sunshade is nebulized surface aluminum of 0.3mm thickness. (Can choose mirror surface aluminum)

Application: Officer, Meeting room, Building, Department shop, Library etc.

Characteristic: High efficiency air conditioner model lighting.

◎TL-43068A

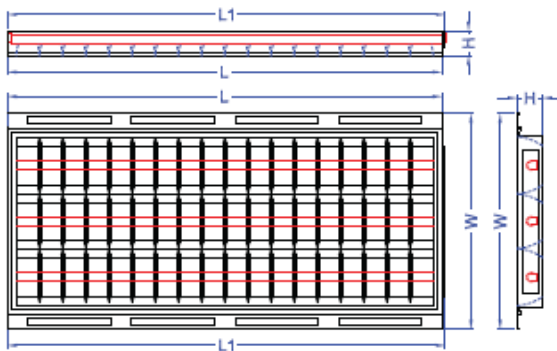

#### Direction (說明):

For lamps: T5 TL5 54W, 24W \*4      T5TL5 54W, 24W \*3

Material: Mild steel sheet of 0.5mm thickness. The metalwork shall be rust inhibited to prevent corrosion.

Sunshade is nebulized surface aluminum of 0.3mm thickness. (Can choose mirror surface aluminum)

Application: Officer, Meeting room, Building, Department shop, Library etc.

Characteristic: High efficiency air conditioner model lighting.


Specification	Type	For lamps	Ballast	Dimension (LxWxH)
2'x 4'	TL-544065A-G	T5→TL5 54Wx4	Electronic ballast	1210x603x70mm
2'x 4'	TL-284065A-G	T5→TL5 28Wx4	Electronic ballast	1210x603x70mm
2'x 4'	TL-543065A-G	T5→TL5 54Wx3	Electronic ballast	1210x603x70mm
2'x 4'	TL-283065A-G	T5→TL5 28Wx3	Electronic ballast	1210x603x70mm
2'x 4'	TL-544068A-G	T5→TL5 54Wx4	Electronic ballast	1210x603x70mm
2'x 4'	TL-284068A-G	T5→TL5 28Wx4	Electronic ballast	1210x603x70mm
2'x 4'	TL-543068A-G	T5→TL5 54Wx3	Electronic ballast	1210x603x70mm
2'x 4'	TL-283068A-G	T5→TL5 28Wx3	Electronic ballast	1210x603x70mm

## T-BAR lighting series: Air conditioner model lighting

### T-BAR 式照明系列：空調型燈具

#### Lighting frame dimensions (燈具尺寸示意圖)

◎TL-42065A

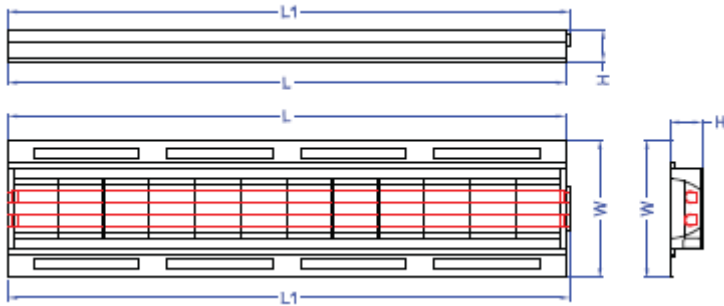

#### Direction (說明):

For lamps: T5 TL5 54W, 28W \*4      T5TL5 24W, 14W \*3


Material: Mild steel sheet of 0.5mm thickness. The metalwork shall be rust inhibited to prevent corrosion.

Sunshade is nebulized surface aluminum of 0.3mm thickness. (Can choose mirror surface aluminum)

Application: Officer, Meeting room, Building, Department shop, Library etc.

Characteristic: High efficiency air conditioner model lighting.

◎TL-42068A

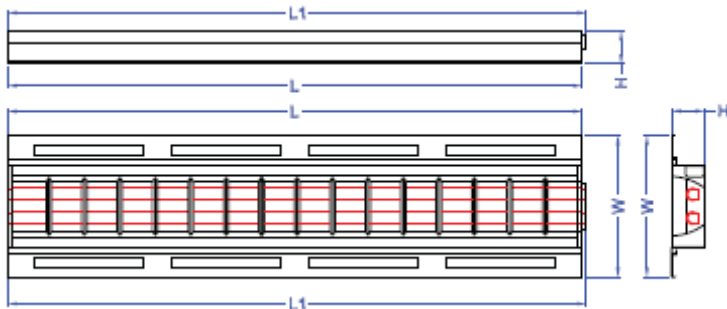

#### Direction (說明):

For lamps: T5 TL5 54W, 28W \*4      T5TL5 24W, 14W \*3

Material: Mild steel sheet of 0.5mm thickness. The metalwork shall be rust inhibited to prevent corrosion.

Sunshade is nebulized surface aluminum of 0.3mm thickness. (Can choose mirror surface aluminum)

Application: Officer, Meeting room, Building, Department shop, Library etc.


Characteristic: High efficiency air conditioner model lighting

Specification	Type	For lamps	Ballast	Dimension (L×W×H)
1'× 4'	TL-542065A-G	T5→TL5 54W×2	Electronic ballast	1210×300×70mm
1'× 4'	TL-282065A-G	T5→TL5 28W×2	Electronic ballast	1210×300×70mm
1'× 2'	TL-242065A-G	T5→TL5 24W×3	Electronic ballast	603×300×70mm
1'× 2'	TL-142065A-G	T5→TL5 14W×3	Electronic ballast	603×300×70mm
1'× 4'	TL-542068A-G	T5→TL5 54W×4	Electronic ballast	1210×300×70mm
1'× 4'	TL-282068A-G	T5→TL5 28W×4	Electronic ballast	1210×300×70mm
1'× 2'	TL-242068A-G	T5→TL5 24W×3	Electronic ballast	603×300×70mm
1'× 2'	TL-142068A-G	T5→TL5 14W×3	Electronic ballast	603×300×70mm


# T-BAR lighting series: Air conditioner model lighting

## T-BAR 式照明系列：空調型燈具

©TL-283068A-M

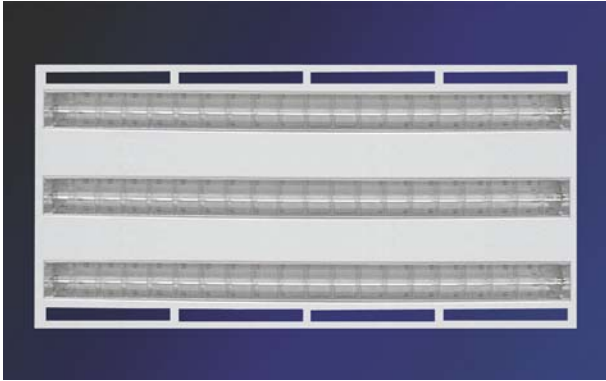

Lighting frame dimensions (燈具尺寸示意圖)

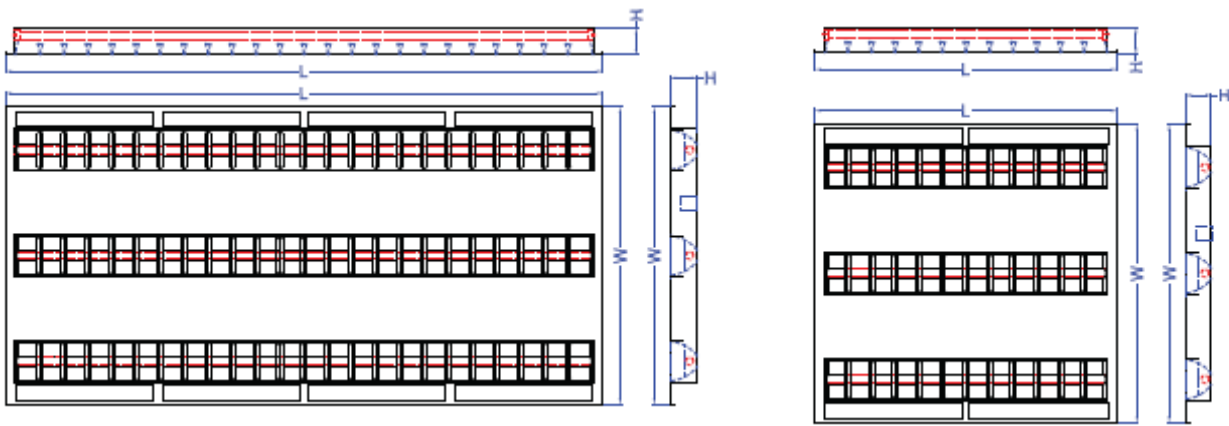

### Direction (說明):

For lamps: T5 TL5 54W, 28W, 24W, 14W \*4    54W, 28W, 24W, 14W \*3    54W, 28W, 24W, 14W \*2

Material: Mild steel sheet of 0.6mm thickness. The metalwork shall be rust inhibited to prevent corrosion.

The frame is mild steel sheet of 1.0mm thickness. Sunshade is nebulized surface aluminum of 0.3mm thickness. (Can choose mirror surface aluminum)

Application: Officer, Meeting room, Building, Department shop, Library etc.

Characteristic: Low glare and sumptuous air conditioner model lighting.

Specification	Type	For lamps	Ballast	Dimension (L×W×H)
2'× 4'	TL-544068A-M	T5→TL5 54W×4	Electronic ballast	1210×603×52mm
2'× 4'	TL-284068A-M	T5→TL5 28W×4	Electronic ballast	1210×603×52mm
2'× 2'	TL-244068A-M	T5→TL5 24W×4	Electronic ballast	603×603×52mm
2'× 2'	TL-144068A-M	T5→TL5 14W×4	Electronic ballast	603×603×52mm
2'× 4'	TL-543068A-M	T5→TL5 54W×3	Electronic ballast	1210×603×52mm
2'× 4'	TL-283068A-M	T5→TL5 28W×3	Electronic ballast	1210×603×52mm
2'× 2'	TL-243068A-M	T5→TL5 24W×3	Electronic ballast	603×603×52mm
2'× 2'	TL-143068A-M	T5→TL5 14W×3	Electronic ballast	603×603×52mm
1'× 4'	TL-542068A-M	T5→TL5 54W×2	Electronic ballast	1210×300×52mm
1'× 4'	TL-282068A-M	T5→TL5 28W×2	Electronic ballast	1210×300×52mm
1'× 2'	TL-242068A-M	T5→TL5 24W×2	Electronic ballast	603×300×52mm
1'× 2'	TL-142068A-M	T5→TL5 14W×2	Electronic ballast	603×300×52mm

## T-BAR lighting series: Air conditioner model lighting

### T-BAR 式照明系列：空調型燈具

灑水頭、偵煙器、廣播器-整合式系統天花燈具



◎TL-144072A



◎TL-144073A



#### Lighting frame dimensions (燈具尺寸示意圖)

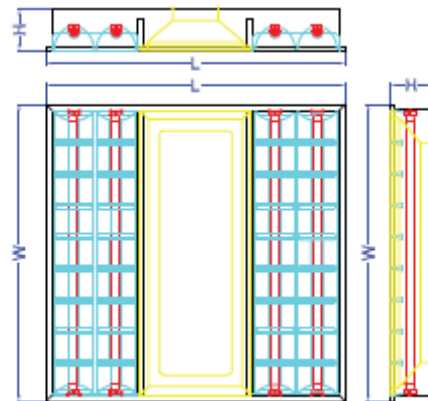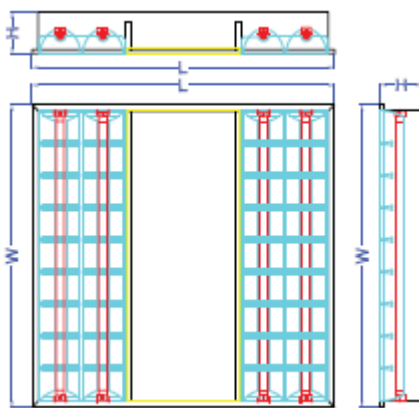

#### Direction (說明):

For lamps: T5 TL5 54W, 28W, 24W, 14W \*4

Material: Mild steel sheet of 0.8mm thickness. The metalwork shall be rust inhibited to prevent corrosion.

Sunshade is nebulized surface aluminum of 0.3mm thickness. (Can choose mirror surface aluminum)

Application: Officer, Meeting room, Building, Department shop, Library etc.

Characteristic: Low glare and sumptuous air conditioner model lighting.

Type	For lamps	Ballast	Dimension (L×W×H)
TL-544072A	T5→TL5 54W×4	Electronic ballast	1195×595×82mm
TL-284072A	T5→TL5 28W×4	Electronic ballast	1195×595×82mm
TL-244072A	T5→TL5 24W×4	Electronic ballast	595×595×82mm
TL-144072A	T5→TL5 14W×4	Electronic ballast	595×595×82mm
TL-544073A	T5→TL5 54W×4	Electronic ballast	1195×595×82mm
TL-284073A	T5→TL5 28W×4	Electronic ballast	1195×595×82mm
TL-244073A	T5→TL5 24W×4	Electronic ballast	595×595×82mm
TL-144073A	T5→TL5 14W×4	Electronic ballast	595×595×82mm


# T-BAR lighting series: Air conditioner model lighting

## T-BAR 式照明系列：空調型燈具

©FHP-255



### Lighting frame dimensions (燈具尺寸示意圖)

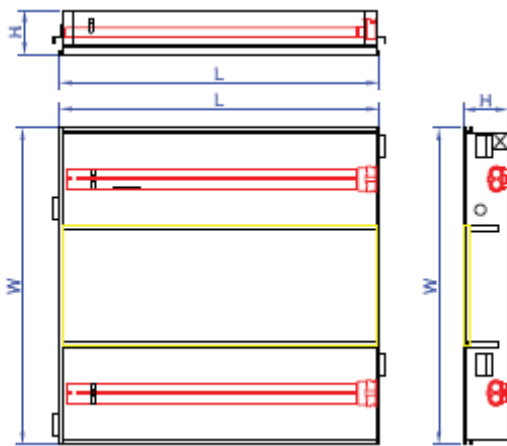

### Direction (說明):

For lamps: PL PL-L 55W, 40W\*2

Material: Mild steel sheet of 0.6mm thickness. The metalwork shall be rust inhibited to prevent corrosion.

Reflector is mild steel sheet of 0.6mm thickness.

Application: Officer, Meeting room, Building, Department shop, Library etc.

Characteristic: Low glare air conditioner model lighting.

Type	For lamps	Ballast	Dimension (LxWxH)
FHP-255	PL→PL-L 55Wx2	Electronic ballast	586x586x82mm
FHP-240	PL→PL-L 40Wx2	Electronic ballast	586x586x82mm

## T-BAR lighting series: Air conditioner model lighting

### T-BAR 式照明系列：空調型燈具

◎TL-144067A



#### Direction (說明):

For lamps: PL PL-L 24W, 14W\*4

Material: Mild steel sheet of 0.6mm thickness. The metalwork shall be rust inhibited to prevent corrosion.

Sunshade is nebulized surface aluminum of 0.3mm thickness. (Can choose mirror surface aluminum)

Application: Officer, Meeting room, Building, Department shop, Library etc.

Characteristic: Low glare air conditioner model lighting.

Specification	Type	For lamps	Ballast	Dimension (L×W×H)
	TL-244067A	T5→TL5 24W×4	Electronic ballast	603×603×70mm
	TL-144067A	T5→TL5 14W×4	Electronic ballast	603×603×70mm


# T-BAR lighting series: Air conditioner model lighting

## T-BAR 式照明系列：空調型燈具


◎TLP-363064A



◎TLP-362088A

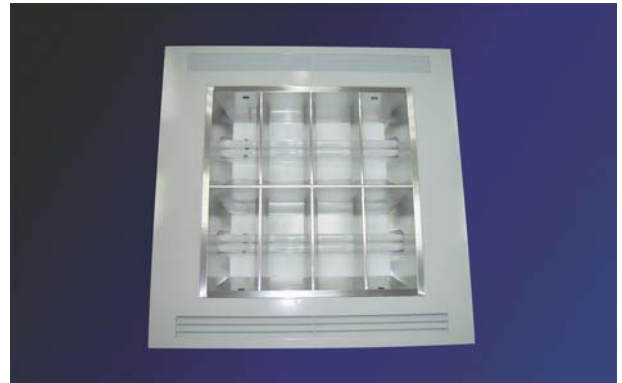

### Lighting frame dimensions (燈具尺寸示意圖)

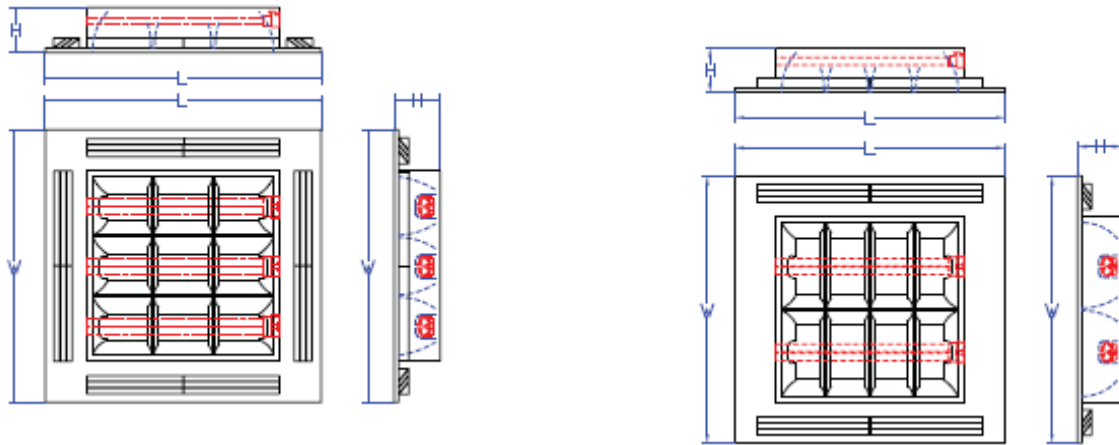

### Direction (說明):

For lamps: PL PL-L 36W\*3

For lamps: PL PL-L 36W\*2

Material: Mild steel sheet of 0.6mm thickness. The metalwork shall be rust inhibited to prevent corrosion.

The frame is mild steel sheet of 1.0mm thickness. Sunshade is nebulized surface aluminum of 0.3mm thickness. (Can choose mirror surface aluminum)

Application: Officer, Meeting room, Building, Department shop, Library etc.

Characteristic: Low glare air conditioner model lighting.


Specification	Type	For lamps	Ballast	Dimension (L×W×H)
2'× 2'	TLP-363064A	PL→PL-L36W×3	Electronic ballast	603×603×100mm
2'× 2'	TLP-362088A	PL→PL-L36W×2	Electronic ballast	603×603×100mm

# T-BAR lighting series: Air conditioner model lighting


## T-BAR 式照明系列：空調型燈具

### Lighting frame dimensions (燈具尺寸示意圖)

◎CAS-552065A

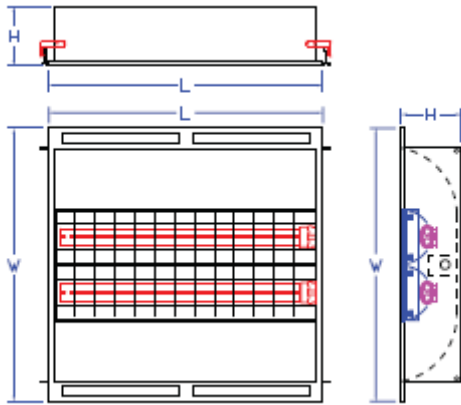

◎CAS-552065A

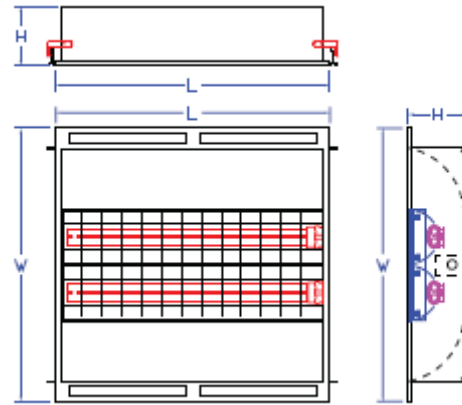

### ◎CAS-552065A Direction (說明):

For lamps: PL PL-L 55W, 40W\*2

Material: Mild steel sheet of 0.6mm thickness. The metalwork shall be rust inhibited to prevent corrosion.

Reflector is mild steel sheet of 0.6mm thickness. Sunshade is nebulized surface aluminum of 0.3mm thickness. (Can choose mirror surface aluminum)

Application: Officer, Meeting room, Building, Department shop, Library etc.

Characteristic: High efficiency air conditioner model lighting.

### ◎CAS-552068A Direction (說明):

For lamps: PL PL-L 55W, 40W\*2

Material: Mild steel sheet of 0.6mm thickness. The metalwork shall be rust inhibited to prevent corrosion.

Reflector is mild steel sheet of 0.6mm thickness. Sunshade is nebulized surface aluminum of 0.3mm thickness. (Can choose mirror surface aluminum)

Application: Officer, Meeting room, Building, Department shop, Library etc.

Characteristic: Low glare air conditioner model lighting.

Specification	Type	For lamps	Ballast	Dimension (L×W×H)
	CAS-552065A	PL→PL-L55W×2	Electronic ballast	595×595×130mm
	CAS-552068A	PL→PL-L55W×2	Electronic ballast	595×595×130mm
	CAS-402065A	PL→PL-L40W×2	Electronic ballast	595×595×130mm
	CAS-402068A	PL→PL-L40W×2	Electronic ballast	595×595×130mm